
 **Cat.6_A STP Field Terminable Plug, 180 Deg.**
MP36

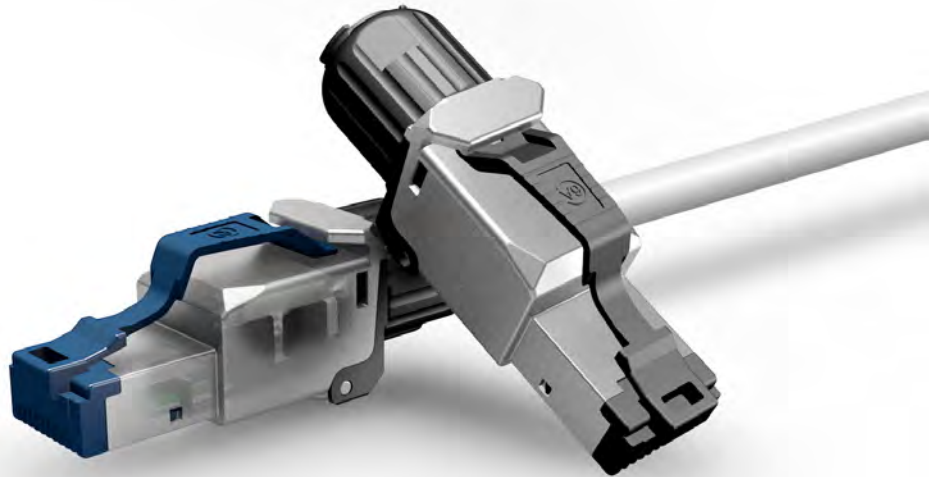

Specification:

Qualified Screened Class 6_A Connecting Hardware
Complied of TIA-568.2-D
IEC60603-7-51
ISO/IEC11801 2.2 Edition
CENELEC EN 50173-1

Power over Ethernet:

PoE+ type I & II
IEEE 802.3at
IEC 60512-99-002(2022-01)
IEC 60512-9-3 (2011-06)

Electrical:

Insulation Resistance: 500 Mohms minimum
Contact Resistance: 20 mohms maximum

Mechanical:

Plug Insertion Life: 750 Cycles Minimum.
Plug Retention Force: 20 lbs Minimum.
Temperature: -40°C to 68°C

Physicals:

IDC-Contact: T=0.4mm phosphor bronze, Sn over nickel plating.
Accept Cable: #26~23AWG solid wire. Outer diameter 6.0~8.5

Application:

- MPTL
- Industrial
- Enterprise

