


Headroom: 3.2 dB (NEXT 36-45)
Test Limit: TIA Cat 6A Channel



➤ Cat.6A Die Casting Coupler


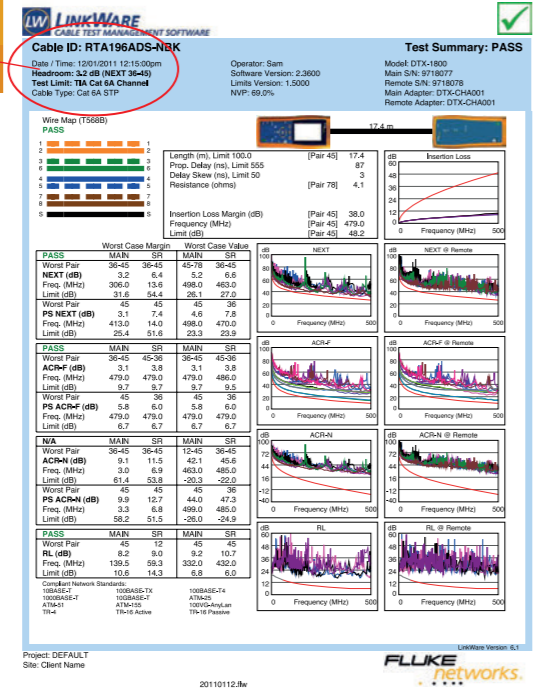


- Zinc alloy die-casting.
- Available for snapping into 24 ports panel.
- Standard RJ45 female to female adapter.
- It provides extension solution.
- Ideal for feed through/panel applications.




➤ Cat.6A Shielded Coupler

- Fully shielded.
- Available for snapping into 24 ports panel.
- Standard RJ45 female to female adapter.
- It provides extension solution.
- Ideal for feed through/panel applications.

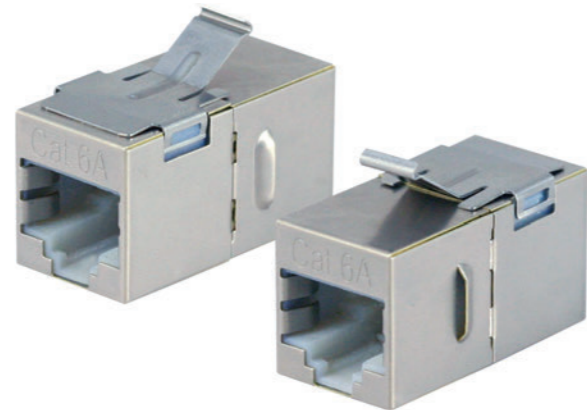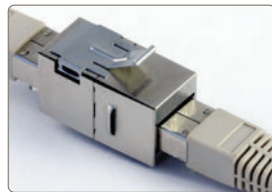


➤ Cat.6A Unshielded Coupler

- Available for snapping into 24 ports panel.
- Standard RJ45 female to female adapter.
- It provides extension solution.
- Ideal for feed through/panel applications.

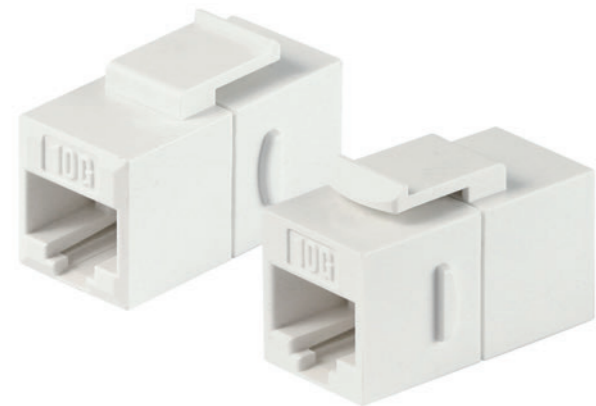

Headroom: 7.7 dB (NEXT 36-78)
Test Limit: TIA Cat 6A Channel

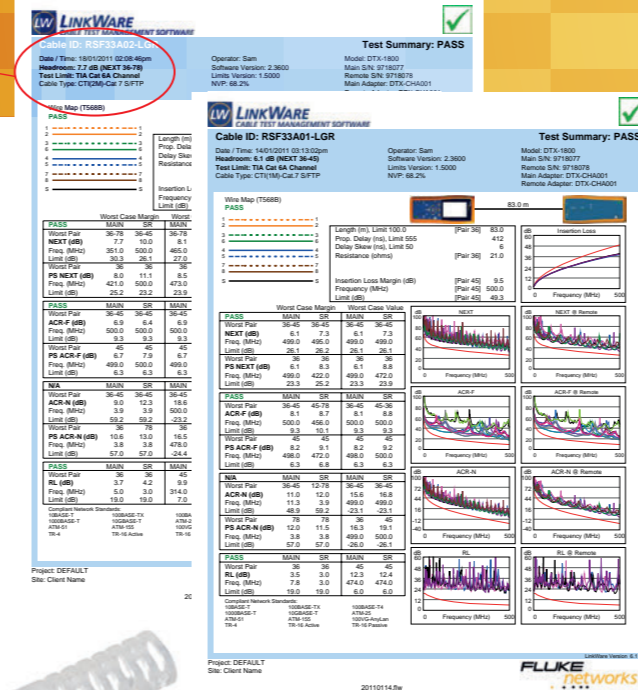

➤ Cat.6A STP Modular Plug & Cat.6A Patch Cord

- Providing more headroom for Cat.6 Connecting Hardware performance.
- Specially for EMI & EMC requirements.
- Using together with Telebox plug cover(ex: SR01XX) for identification and latch protection.



➤ Cat.6A UTP Modular Plug & Cat.6A Patch Cord



- Providing more headroom for Cat.6 Connecting Hardware performance.
- Specially for EMI & EMC requirements.
- Using together with Telebox plug cover(ex: R1433-8XX) for identification and latch protection.



TELEBOX INDUSTRIES CORP.
浩揚工業股份有限公司
4F, No. 306 Tatung Road, Sec 1, Hsichih-Taipei 22146, Taiwan
Tel : +886-2-26429337
Fax : +886-2-26425779
E-mail: sales@telebox.com
http://www.telebox.com

Category 6A Cabling Products

100% design develop produced in Taiwan

